


FX12

STANDARD

12mm DIAMETER HEAD

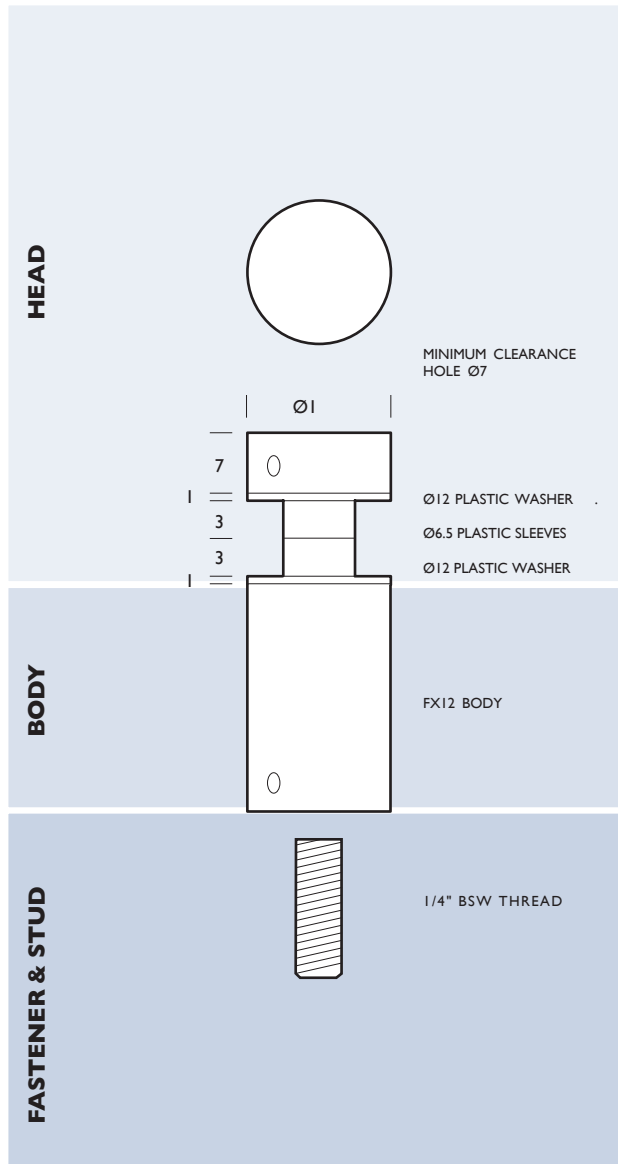


HEAD:

FX12 HEAD




FX12 HEAD PACK:




BODIES:


FX12 10 BODY




FX12 20 BODY



FX12 30 BODY




FX12 50 BODY




CUSTOM BODY LENGTHS AVAILABLE

FX19 BW
BODY WASHER




OPTIONAL
LOAD SPREADING
BODY WASHER

FX TOOL:




FASTENERS: FASTENERS SUPPLIED WITH 1/4\"/>

FXNW
NUT & WASHER




FXST
SPRING TOGGLE



FXTI
THREADED INSERT



FXLB
LAG BOLT



MATERIAL:

316 Grade Stainless Steel

PANEL THICKNESS:

Head Pack 4 - 6mm

Optional studs available:

8mm, 10mm, 12mm, 16mm

MINIMUM CLEARANCE HOLE:

With isolating sleeve Ø7

Without isolating sleeve Ø4.5

THREAD:

Head: M4 x 4mm

Fastener: 1/4" B.S.W x 8mm

FINISH:

Satin Stainless Steel

LOCATION:

Interior and exterior applications

PRODUCT COMPLIANCY:

As FIX Systems are not certified engineers, it is the buyer's responsibility to ensure that the application of all FIX products is suitable for its intended use and that it is compliant with relevant safety standards.

