


FX32 TRI


LOW PROFILE

32mm DIAMETER STRUCTURAL LOW PROFILE HEAD

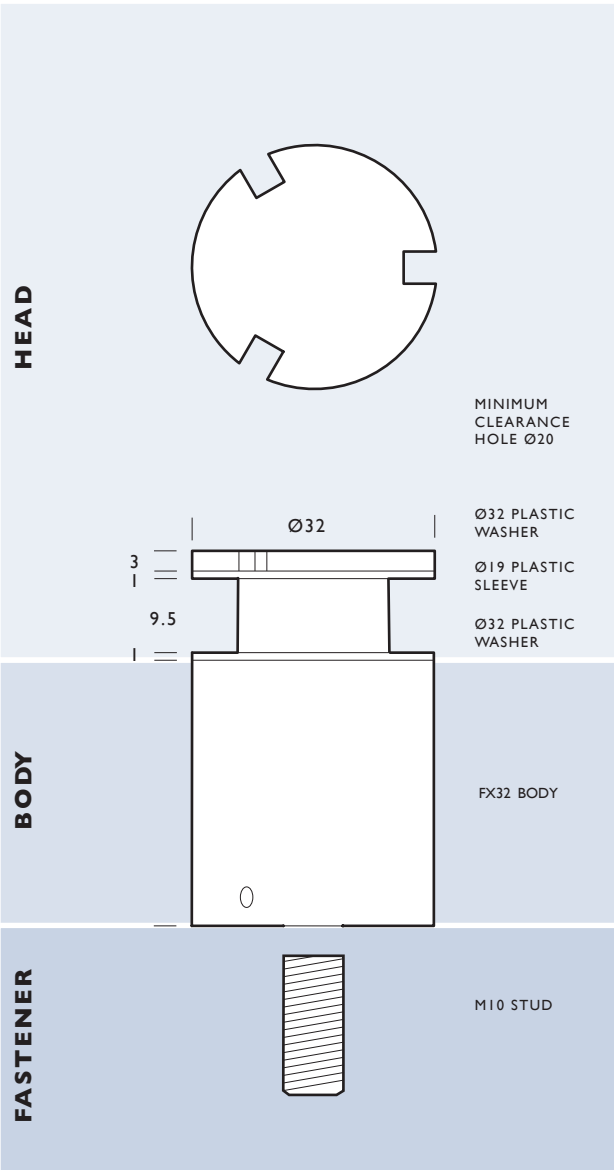


HEADS:

FX32 TRI




FX32 TRI HEAD PACK:

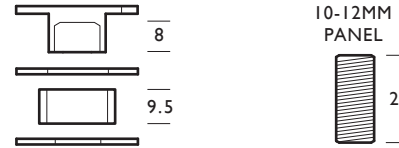


BODIES:


FX32 15 BODY




FX32 25 BODY




FX32 35 BODY




FX32 50 BODY



FX32 100 BODY

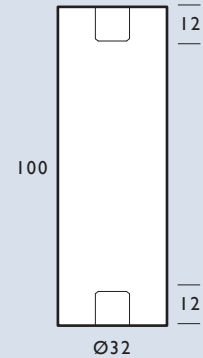


FX32 BW
BODY WASHER



OPTIONAL
LOAD SPREADING
BODY WASHER


FX32TRI TOOL:

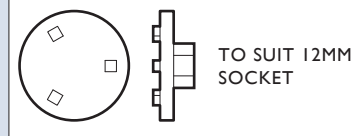

FASTENERS M10:

fasteners supplied with M10 stud


FXCS
CAP SCREW



FXMA
MASONARY
ANCHOR LOXIN




FXFP
FACE PLATE



FXTI
THREADED INSERT




FXTB
TOGGLE BOLT



FXAT
100mm ALL THREAD
can be used with chemset glue



FXLB
LAG BOLT



MATERIAL:

316 Grade Stainless Steel

PANEL THICKNESS:

Head Pack 10 - 12mm
Optional studs available:
16mm, 20mm, 25mm, 30mm, 35mm,
40mm, 50mm, custom

MINIMUM CLEARANCE HOLE:

With isolating sleeve Ø20
Without isolating sleeve Ø17

THREAD:

Head: M10 x 8mm
Fastener: M10 x 12mm

FINISH:

Satin Stainless Steel

LOCATION:

Interior and exterior applications

PRODUCT COMPLIANCY:

As FIX Systems are not certified engineers,
it is the buyer's responsibility to ensure that
the application of all FIX products is suitable
for its intended use and that it is compliant
with relevant safety standards.

