
FX19 PSF PANEL SCREW FIXING

19mm DIAMETER PANEL SCREW FIXING

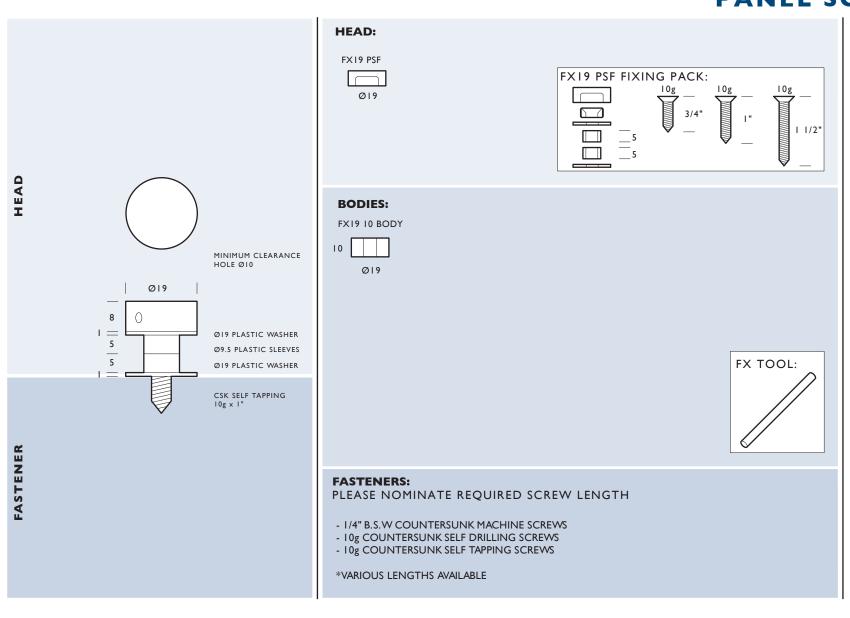

MATERIAL:

316 Grade Stainless Steel

PANEL THICKNESS:

Head Pack 6 - 12mm glass or 1-12mm other sheet materials.

Can be used with any 10g countersunk self tapping, self drilling or machine screw.

MINIMUM CLEARANCE HOLE:

With isolating sleeve Ø9.5 Without isolating sleeve Ø7

SCREW:

10g countersunk screw

FINISH:

Satin Stainless Steel

LOCATION:

Interior and exterior applications

PRODUCT COMPLIANCY:

As FIX Systems are not certified engineers, it is the buyer's responsibility to ensure that the application of all FIX products is suitable for its intended use and that it is compliant with relevant safety standards.



WWW.FIX.COM.AU PH: 1300 133 215