



25mm DIAMETER COUNTERSUNK BACK FIXING

FX25 CSA COUNTERSUNK PIN

HEAD




MINIMUM CLEARANCE
HOLE Ø10

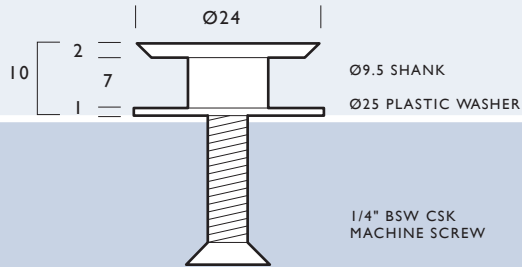


FASTENER

HEAD:

FX25 CSA




Ø25

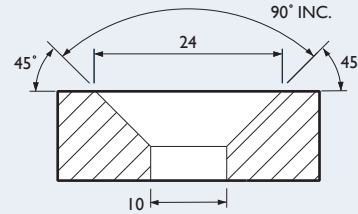

MOUNTING HOLE SPECIFICATION

FX25 CSA FIXING PACK:



BODY:

FX25 10 BODY



Ø25

FASTENER:

please nominate required screw length

- 1/4" B.S.W CSK MACHINE SCREWS

MATERIAL:

316 Grade Stainless Steel

PANEL THICKNESS:

Head Pack 10mm > (non-glass)

Optional screws available:

any 1/4" B.S.W machine screw

MINIMUM CLEARANCE HOLE:

The clearance hole is 10mm, which is then countersunk to 24mm (refer to diagram).

THREAD:

Head: 1/4" B.S.W

FINISH:

Satin Stainless Steel

LOCATION:

Interior and exterior applications

PRODUCT COMPLIANCY:

As FIX Systems are not certified engineers, it is the buyer's responsibility to ensure that the application of all FIX products is suitable for its intended use and that it is compliant with relevant safety standards.

