


FX25 CSP



COUNTERSUNK PIN

25mm DIAMETER COUNTERSUNK PIN

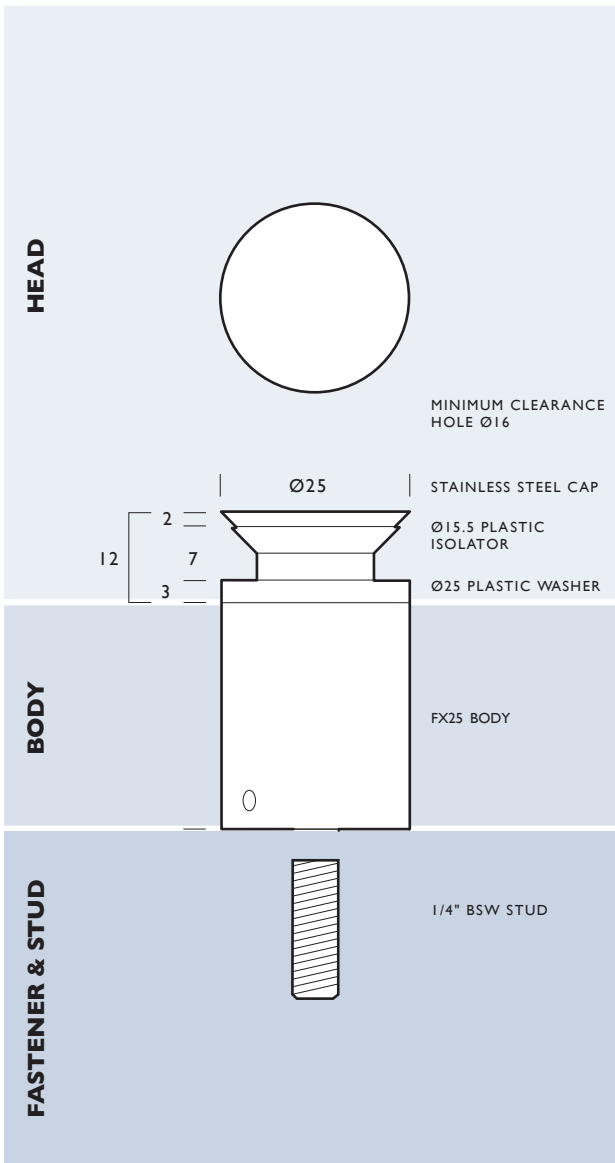


HEAD:

FX25 CSP

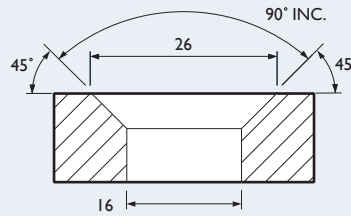


MOUNTING HOLE SPECIFICATION

FX25 CSP HEAD PACK:

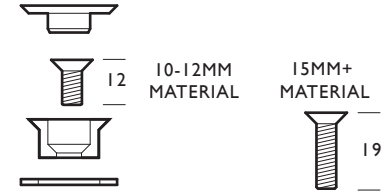


BODY:


FX25 10 BODY




FX25 20 BODY




FX25 30 BODY




FX25 50 BODY




FX25 75 BODY



FX25 100 BODY

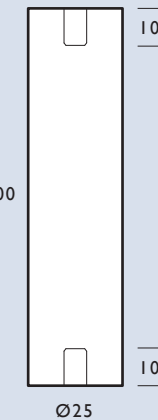

FX25 BW
BODY WASHER




OPTIONAL
LOAD SPREADING
BODY WASHER

CUSTOM BODY LENGTHS AVAILABLE


FASTENER:

fasteners supplied with 1/4" bsw stud

FXNW
NUT & WASHER




FXST
SPRING TOGGLE




FXTI
THREADED INSERT



FXLB
LAG BOLT



FXFP
FACE PLATE



FXMA
MASONRY ANCHOR



FXCA
CAVITY ANCHOR



MATERIAL:

316 Grade Stainless Steel

PANEL THICKNESS:

Head Pack 10 - 15mm
Optional 1/4" B.S.W countersunk machine screws available:

12mm, 19mm, 25mm, 32mm,
38mm, 44mm, 50mm, 75mm

MINIMUM CLEARANCE HOLE:

The clearance hole is 16mm, which is then countersunk to 26mm (refer to diagram).

THREAD:

1/4" B.S.W countersunk machine screw
Fastener: 1/4" B.S.W x 8mm

FINISH:

Satin Stainless Steel

LOCATION:

Interior and exterior applications

PRODUCT COMPLIANCY:

As FIX Systems are not certified engineers, it is the buyer's responsibility to ensure that the application of all FIX products is suitable for its intended use and that it is compliant with relevant safety standards.

