


25mm DIAMETER HEAD




HEADS:

FX25 HEAD

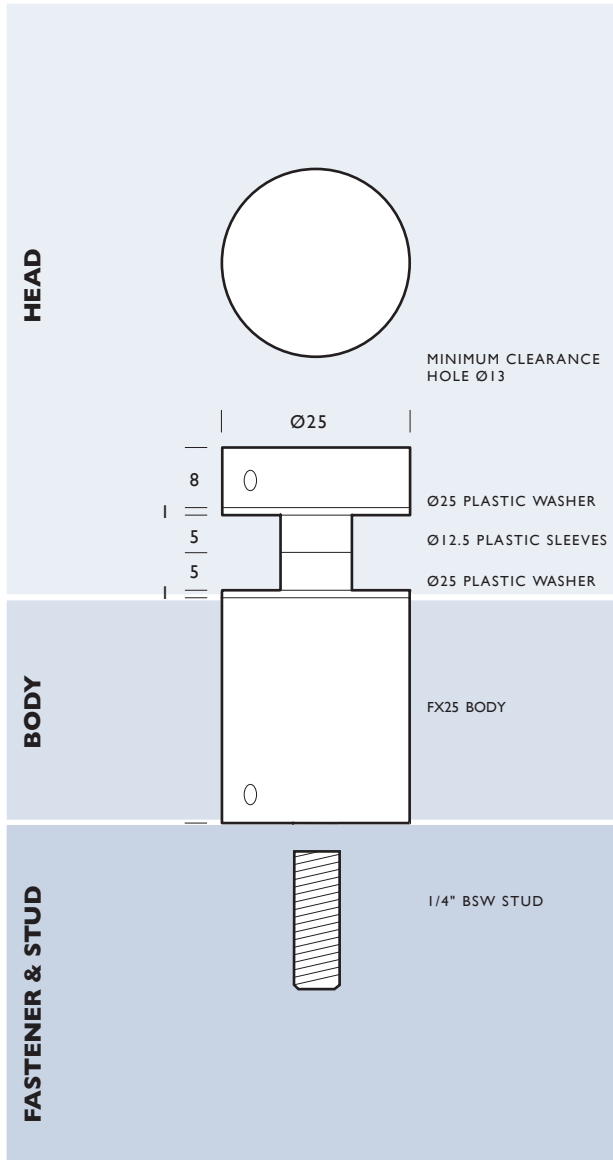


FX25 HEAD PACK:

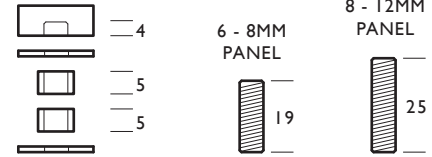

BODIES:

FX25 10 BODY FX25 20 BODY FX25 30 BODY FX25 50 BODY FX25 75 BODY FX25 100 BODY

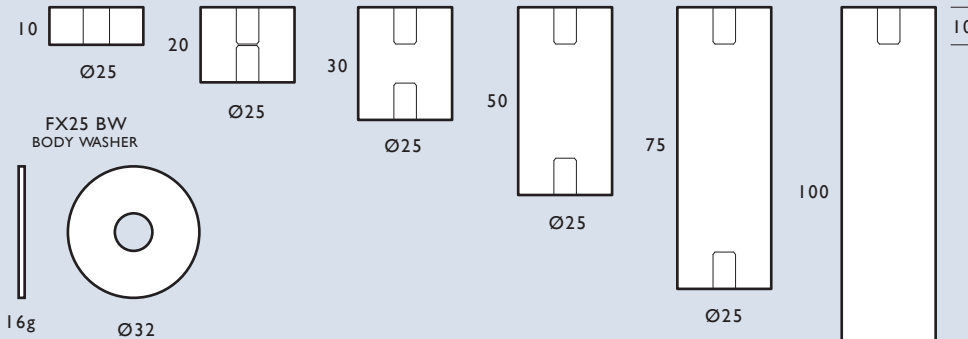


OPTIONAL LOAD SPREADING BODY WASHER

CUSTOM BODY LENGTHS AVAILABLE

FASTENERS: *fasteners supplied with 1/4" bsw stud*

FXNW NUT & WASHER FXST SPRING TOGGLE FXTI THREADED INSERT FXLB LAG BOLT FXFP FACE PLATE FXMA MASONRY ANCHOR FXCA CAVITY ANCHOR

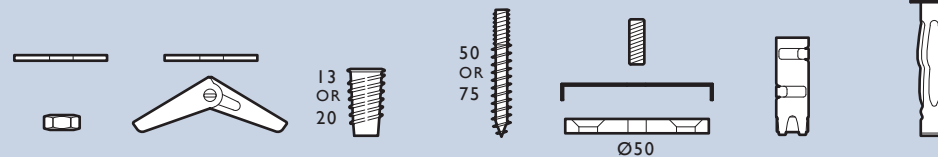

FX25 STANDARD

MATERIAL:

316 Grade Stainless Steel

PANEL THICKNESS:

Head Pack 6 - 12mm

Optional studs available:

19mm, 22mm, 25mm, 27mm, 29mm, 32mm, 38mm, 51mm, 75mm, 100mm

MINIMUM CLEARANCE HOLE:

With isolating sleeve Ø13

Without isolating sleeve Ø7

THREAD:

Head: 1/4" B.S.W x 4mm

Fastener: 1/4" B.S.W x 8mm

FINISH:

Satin Stainless Steel

LOCATION:

Interior and exterior applications 316g S/S

PRODUCT COMPLIANCY:

As FIX Systems are not certified engineers, it is the buyer's responsibility to ensure that the application of all FIX products is suitable for its intended use and that it is compliant with relevant safety standards.

